



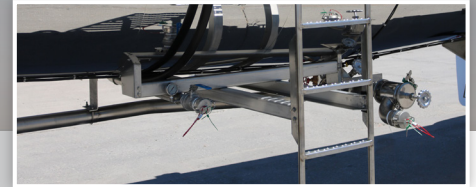

SOLUTIONS BUILT FOR YOU.

STAINLESS STEEL DOUBLE CONICAL

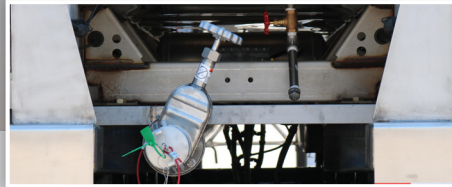

HOT COMMODITY.

When it comes to moving general chemicals, food commodities, agricultural products, consumer goods and corrosive products, such as acids, efficiently and profitably, total performance during all phases of operation is paramount—from loading, to transport, to unloading and cleanout and back again—with proven engineering, size-optimized laser-welded barrel joints, operator-friendly design and leading reputation for durability.

SOLUTIONS-DRIVEN.

MATERIAL

Available in 304, 316L, LDX2101 and 2205

SHELL FULL CAPACITY

From 3,500 – 10,000 Gal-
lons??

SOLUTIONS-DRIVEN

- Comprehensive product offerings
- Region- and load-specific engineering
- Customer collaboration in design
- Comprehensive dealer network
- Personal, responsive sales and technical support
- Industry's largest service network with certified and authorized service centers

INDUSTRY LEADERSHIP

- Heil Trailer industry-leading Silver 4-year limited warranty
- Roll Stability System (RSS) standard
- Lean manufacturing
- Triple ISO-Certified Safety/Quality/Environmental Responsibility
- Exclusive master welder certification school
- Operator safety training

ENDURING PERFORMANCE

- Superior-quality components designed for longevity
- Driver/operator friendly design
- Low tare weights for max payloads
- Liquid testing of all tanks
- Long-term durability
- Premium resale value

STAINLESS STEEL DOUBLE CONICAL

The Heil Company built its first stainless steel trailer product in 1929, long before most trailer companies even came into existence. Now, Heil Trailer brings its expertise and game-changing innovation to stainless steel for chemicals, fertilizers, acids and food.

Delivering excellence is hard—doing it for more than 100 years is our contract—what generations of loyal customers have come to expect.



VESSEL

- Available in 304, 316L, LDX2101 and 2205
- Available in external ring
- Available in standard, heavy, super and extreme duty ratings
- Operating temperatures: -20° to 500° F
- Available in DOT 407, DOT 412 & Non-Code
- Internal Weld Finish W-0 through W-5



STANDARD FEATURES

- 4" Pressure relief vent
- 3" Vacuum vent
- Stainless steel intransit/steam piping
- Walkway on (4) sides of spill dam
- Aluminum air tank
- Standard 5" insulation compressed to 4" with welded spill dam floor



SAFETY

- Ergonomic, easy access operation valves
- Stainless steel hydraulic lines with front curbside emergency shut off
- Rear mounted EVO
- 3" T316 stainless steel hydrolet valve with 90° 3" stainless steel mail adapter outlet



WARRANTY AND CUSTOMER SERVICE

- 4 year silver warranty package
- 24/7 Technical Support
- Betts "Defender" 3 year warranty package

